

BI-42UFD/O



FEATURES

Maximum capacity in a 42" French door model

Overlay design accepts cabinetry panels of all kinds

Dual refrigeration keeps food fresher longer

Air purification system fights spoilage, odors

Crispers and deli drawers in low-temp, high-humidity zones for optimum freshness

Two-column shelving for customized storage

Soft-close deli drawer for meats, cheeses and more

Microprocessor control assures peak performance

Water-filtration system reduces contaminants, chlorine taste and odor

Freshness cards for maximum food preservation

Rigorously tested in our U.S. manufacturing facilities to ensure at least 20 years of heavy use

Exceptional 24/7 support from our Customer Care team based in Madison, Wisconsin and just footsteps from our factory

"Soft bright" interior lighting

Over-and-under refrigerator/freezer storage

Magnetic door seal system locks in cold air

Automatic ice maker with "max ice" feature

Adjustable shelves for maximum convenience

ACCESSORIES

Side panel in white or stainless steel

Stainless steel kickplate

Grilles for 83" or 88" finished height (84" is standard)

Side panel mounting kit

Dozen egg container

Replacement air purification cartridge and water filter

Flush inset panels in stainless steel with tubular or pro handles

Full-length standard and extended framed handles

Framed front panels in white or stainless steel

Custom front panel mounting kit

Stainless steel pro handles

Stainless steel tubular handles

Accessories are available through an authorized Sub-Zero dealer. For local dealer information, visit <u>subzero-wolf.com/locator</u>.



HANDLE ACCESSORIES

PRO TUBULAR

PRODUCT DETAILS

REFRIGERATOR

- 6 Adjustable glass shelves
- · 1 Stationary glass shelf
- · 1 Deli drawer with dividers
- · 2 Crisper drawers
- 4 Adjustable door shelves
- 2 Stationary door shelves
- · 2 Adjustable dairy compartments

FREEZER

- · Full-extension roll-out freezer drawer
- · Two-tier wire storage baskets
- Automatic ice maker



PRODUCT SPECIFICATIONS

Model	BI-42UFD/O
Dimensions	42"W x 84"H x 24"D
Door Clearance	22 1/4"
Drawer Clearance	23 5/8"
Weight	582 lb
Refrigerator Capacity	18.3 cu ft
Freezer Capacity	6.4 cu ft
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp circuit
Plumbing Supply	1/4" OD copper, braided stainless steel or PEX tubing
Plumbing Pressure	35–120 psi

ELECTRICAL

7" (178) 6" (152) 75¹/2" (1918) FROM FLOOR RIGHT SIDE OF OPENING

PLUMBING



PANEL SPECIFICATIONS


For complete panels specifications including width/height, weight requirements, thickness requirements and offset details visit <u>subzero-wolf.com/builtinconfigurator</u>.

INTERIOR VIEW




This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS

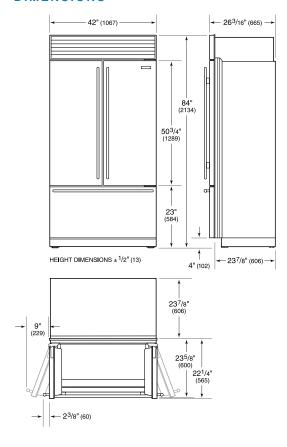

FLUSH INSET INSTALLATION

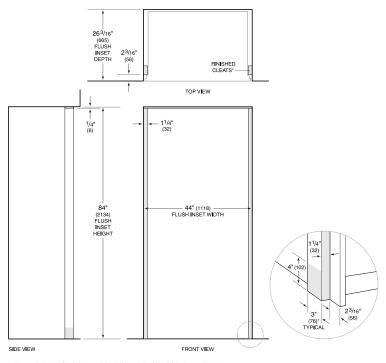

3 (76) typical depth. Shaded areas will be visible and should be finished to match cabinetry. NOTE: Shaded line represents profile of unit with ³/4* (19) panel.