


## FEATURES

- Crafted of heavy-duty stainless steel.
- Internal, in-line or remote blower required.
- Downdraft lowers beneath countertop when not in use.
- Remote-mounted control module with LED indicators.
- Three-speed blower with boost to temporarily increase airflow.
- Delay-off feature to automatically turn unit off.
- Filter clean indicator.
- Dishwasher-safe filters.
- Reversible motor box.
- Adjustable discharge.

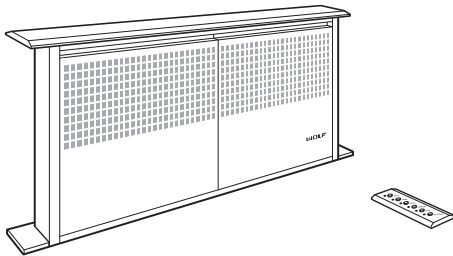

Model DD36

## BLOWER OPTIONS

MODEL DD36	CFM
Internal	600
In-line	600
Remote	600 or 1200

Wolf downdrafts can be used with all Wolf induction, electric and gas cooktops, except contemporary or unframed models. Wolf downdrafts cannot be used with the steamer or fryer module and are not recommended for use with the electric grill module.

## ACCESSORIES

- Internal, in-line and remote blowers (refer to chart).
- Trim kit for installation with sealed burner rangetop.
- Make-up air damper.

Accessories available through an authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, [wolfappliance.com](http://wolfappliance.com).


## SPECIFICATIONS

PRODUCT	
Dimensions	36" W x 14" H x 2" D
Weight	80 lb
DISCHARGE	
Internal	6" Round
In-line or Remote	10" Round
ELECTRICAL	
Supply	120 VAC, 60 Hz
Service	15 amp circuit
Power Cord	2 1/2 ft

Specifications are subject to change without notice. Visit [wolfappliance.com/specs](http://wolfappliance.com/specs) for the most up-to-date information.


Dimensions may vary  $\pm 1/8"$  (3). Dimensions in parentheses are millimeters unless otherwise specified.

## DIMENSIONS

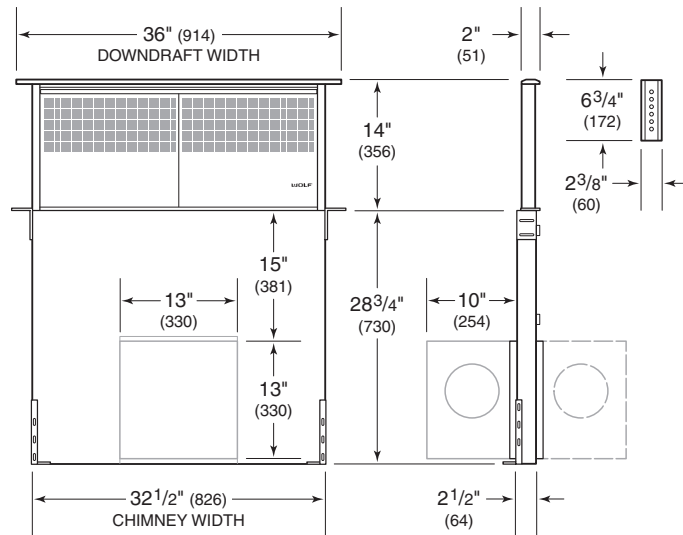

NOTE: Shown with front mounted internal blower with 6" (152) round discharge, dashed line represents rear mount.


## INSTALLATION WITH COOKTOP

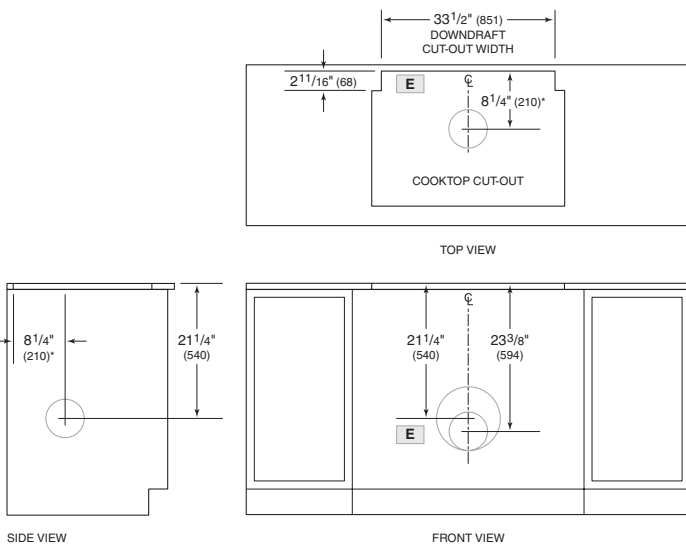

\*6" (152) back from countertop cut-out when internal blower is rear mounted.

NOTE: Internal blower 6" (152) round, side, rear or bottom discharge. In-line and remote blower 10" (254) round, rear discharge. Centerline indicates center of downdraft cut-out.

## INSTALLATION WITH SEALED BURNER RANGETOP

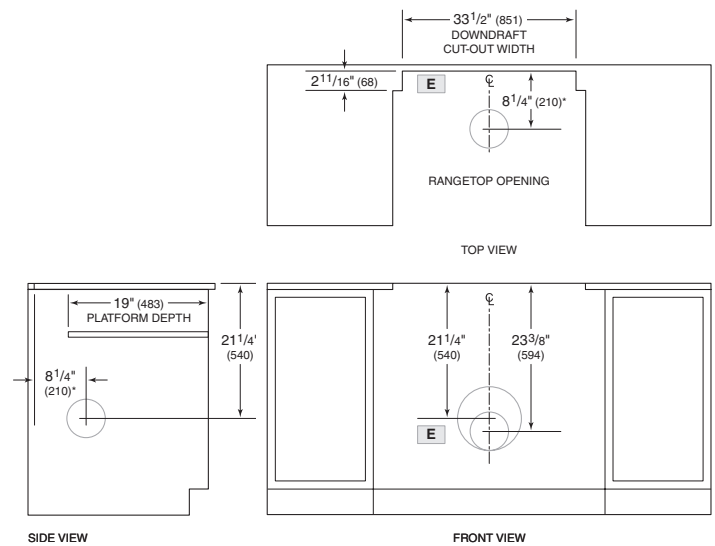

\*6" (152) back from countertop cut-out when internal blower is rear mounted.

NOTE: Internal blower 6" (152) round, side, rear or bottom discharge. In-line and remote blower 10" (254) round, rear discharge. Centerline indicates center of downdraft cut-out.