

SPECS/DIMENSIONS



Print

PRG366GH
36" GAS STANDARD-DEPTH RANGE

UPC code	825225881315
Product color	Stainless steel
Alternative colors available	
Energy source	Gas
Gas type	Natural gas 15 mbar (USA)
Alternative gas type	
Watts (W)	
Current (A)	15
Volts (V)	120
Frequency (Hz)	60
Approval certificates	CSA
Power cord length (in)	72"
Plug type	120V-3 prong
Required cutout size (HxWxD) (in)	36" width slide-in
Overall appliance dimensions (HxWxD) (in)	35 7/8" x 35 15/16" x 24 3/4"
Variable cooker height (in)	7/8"
Product packaging dimensions (HxWxD) (in)	44.99 x 35.99 x 32.99
Net weight (lbs)	333
Gross weight (lbs)	370
Total number of cooktop burners	6
Cooking method first cavity	Bake, Convection Bake, Broil, Sabbath function
Cleaning system - cavity 1	enamel
Clock function	

Knob Material	Full metal
Included accessories	1 x roasting pan, 1 x island trim
Drawer Type	
Sealed Burners	No
Type of grate	Cast iron
Number of Single grates	
Number of Double grates	3
Bake Element Wattages cavity 1 (W)	5570
Bake burner power	
Broil Element Wattages cavity 1 (W)	
Broil burner power	
Convection Element Wattages cavity 1 (W)	
Location of 1st heating element	front left
Dimension of 1st heating element (in)	
Power of 1st heating element (kW)	5.27
Power of 1st burner (BTU)	18000
Location of 2nd heating element	back left
Dimension of 2nd heating element (in)	
Power of 2nd heating element (kW)	5.27
Power of 2nd burner (BTU)	18000
Location of 3rd heating element	middle back
Dimension of 3rd heating element (in)	
Power of 3rd heating element (kW)	5.27
Power of 3rd burner (BTU)	18000
Location of 4th heating element	
Dimension of 4th heating element (in)	
Power of 4th heating element (kW)	5.27
Power of 4th burner (BTU)	18000
Location of 5th heating element	front right

Dimension of 5th heating element
(in)

Power of 5th heating element (kW)	5.27
-----------------------------------	------

Power of 5th burner (BTU)	18000
---------------------------	-------

Location of 6th heating element

Dimension of 6th heating element
(in)

Power of 6th heating element (kW)	5.27
-----------------------------------	------

Power of 6th burner (BTU)	18000
---------------------------	-------

Power of griddle element

Optional accessories - cavity 1	KNOBBLKHC, KNOBBLUHC, PAD36EHS, PAD36EITH, PAD36ELBH, PWOKRINGHC
---------------------------------	--

Construction type	Freestanding
-------------------	--------------

Number of gas burners	6
-----------------------	---

Which kind of hobs can be controlled?	Gas
---------------------------------------	-----

Timer	No
-------	----


Safety device	Overheating protection
---------------	------------------------

SKU	PRG366GH
-----	----------

SERIES

Product name / series name	Freestanding gas cooker
----------------------------	-------------------------

Diagrams

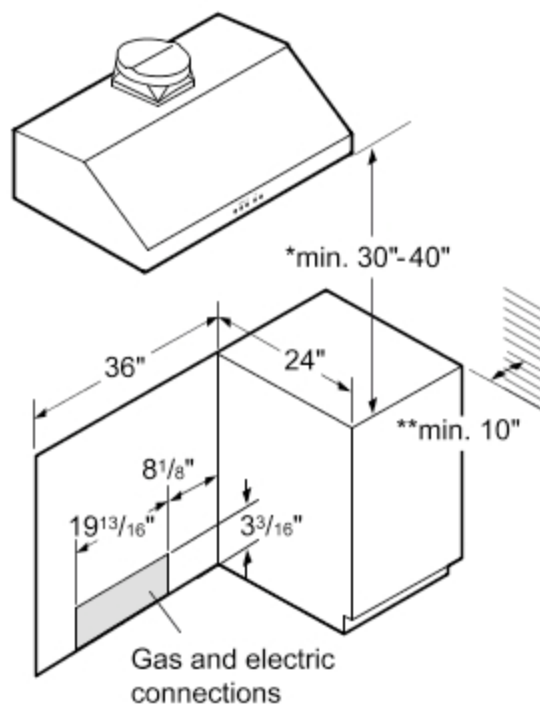


* 30" minimum clearance above cooking surface to non-combustible surface. Minimum clearance above cooking surface to combustible surface is 40".

** 10" minimum clearance from cooking surface to combustible side wall

Note: Most hoods contain combustible components that must be considered when planning the installation.

Measurement in inches

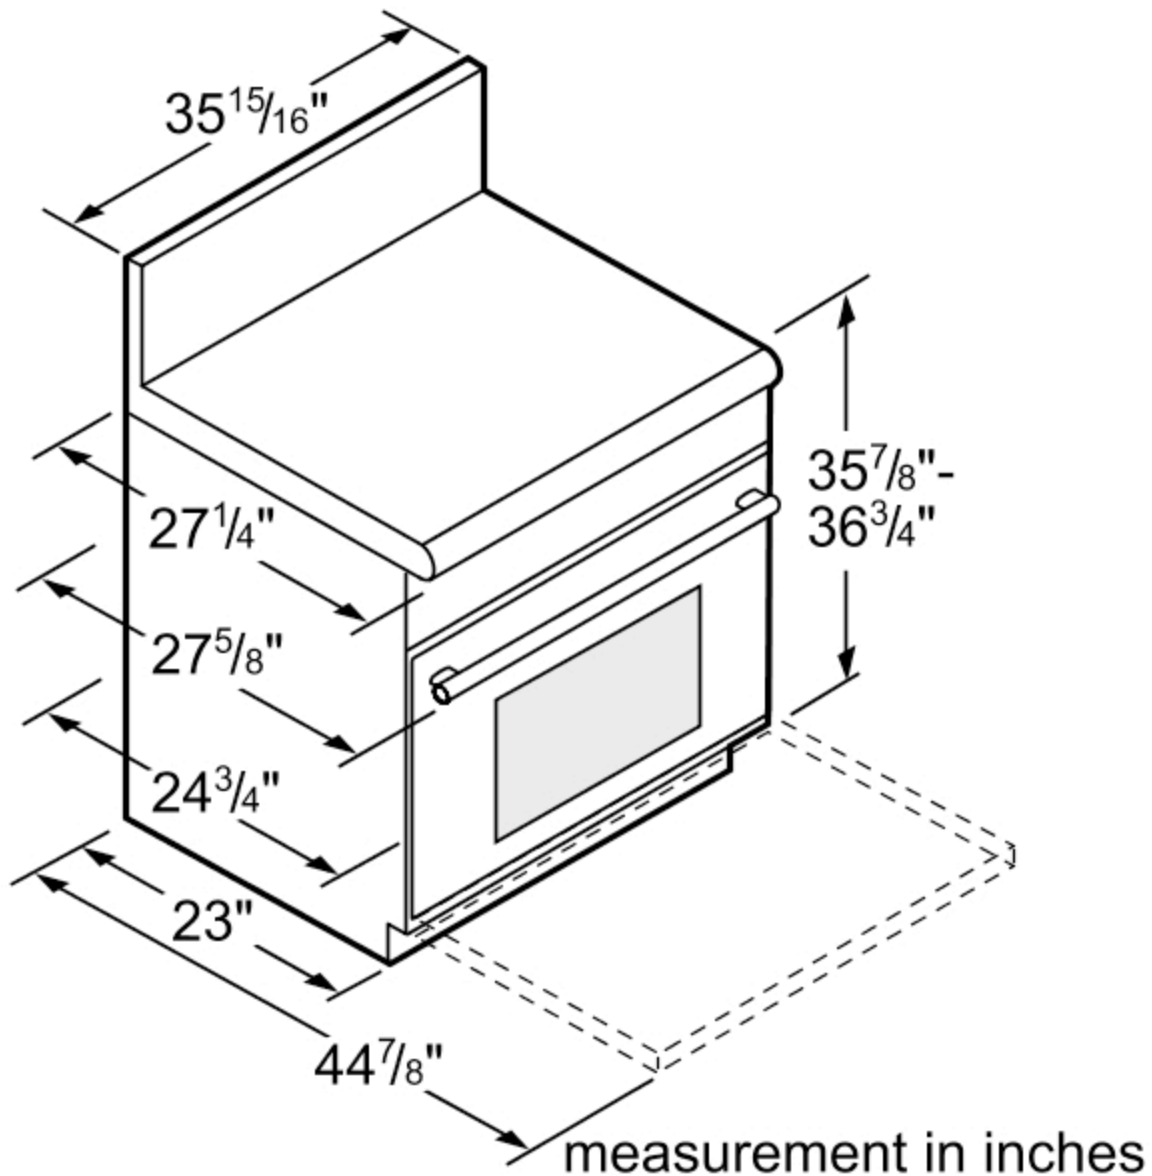

[Click Here to View Features](#)

Natural Gas or LP: Thermador all-gas ranges are shipped by the factory to operate on natural gas or liquid propane. Be sure to order the correct fuel-type and verify the type of gas being used at the installation site matches the type of gas used by the appliances. Thermador Dual-Fuel Pro Harmony Ranges are shipped by the factory to operate on natural gas. They must be converted for use with propane. If the location/job-site requires conversion from natural gas to propane (LP), order PALPKITHC. Field conversion must be done by qualified service personnel only.

Backguard: 36-inch and 48-inch units ship standard with island trim included. A factory-provided insulating background is needed for all installations where there is less than a 12-inch clearance between combustibles and the back edge of range. For 30-inch ranges a 6-inch low backguard is shipped with the range; for 36-inch and 48-inch ranges a 9-inch or 22-inch backguard must be ordered separately.

Ventilation: The HPWB Professional Series wall hoods or the Professional Series Custom Inserts are recommended ventilation solutions for these ranges. The PH Professional Series wall hoods are also a viable option, however the 27-inch depth of the PH Series may not be suitable to all applications.

[Print](#)[Close](#)[Email](#)