

60cm Whole Bean, Plumbed Coffee System

CVA 6805 BRWS



Whole Bean Coffee System

CVA 6805 BRWS



CVA 6805 BRWS

Features:

- M Touch innovative and revolutionary controls are both easy to operate and navigate. An intuitive swipe of the screen will quickly lead you to your desired selection
- OneTouch function prepares two hot beverages in succession when pressing the button twice
- OneTouch for Two operation dispenses two cappuccino or latté macchiato drinks, coffee or espresso simultaneously
- CupSensor recognizes the rim of the cup and alters the spout accordingly
- EasyClick Milk System simply clicks the milk reservoir into and out of place at the front of the machine
- Dishwasher-safe milk flask
- Automatic rinsing and cleaning programs
- Up to 10 user profiles
- The coffee pot function allows up to eight cups of coffee to be brewed at one time
- BrilliantLight
- Timer function
- Ground coffee chute for whole bean bypass
- Removable brew unit for easy cleaning
- Plumbed water connection

Whole Bean Coffee System

CVA 6805 BRWS



SPECIFICATIONS

CVA 6805 BRWS — Item 29680510USA

Overall Unit Width - Excluding Fascia Dimension	21 ⁷ / ₁₆ " (545mm)
Overall Height - Excluding Fascia Dimension	17 ¹ / ₂ " (445mm)
Overall Unit Depth - Excluding Fascia Dimension	18 ¹ / ₈ " (460mm)
Depth with Door Open	41 ¹ / ₂ " (1054mm)
Overall Fascia Dimensions	23 ⁷ / ₁₆ " (595mm) W x 17 ⁵ / ₁₆ " (456mm) H x 1 ³ / ₁₆ " (20mm) D

Built-In

Minimum Cabinet Width	22 ¹ / ₁₆ " — 22 ³ / ₈ " (560 — 568mm)
Minimum Cabinet Depth	21 ⁵ / ₈ " (500mm)
Minimum Cabinet Opening Height	17 ¹¹ / ₁₆ " — 17 ⁵ / ₆₄ " (450 — 452mm)
Minimum Base Support	62 lbs

Additional Cut-outs Required	Venting and Plumbing: 19 ¹¹ / ₁₆ " x 1 ⁹ / ₁₆ " or 78 ³ / ₄ " sq. inches
------------------------------	---

Plumbing	Do not Connect to Reverse Osmosis (RO) System
----------	--

Plumbed Hose	Max length should not exceed 4'11"
--------------	------------------------------------

Electrical

Electrical Requirements	120V 60Hz 15A
Power Cord	Molded plug - NEMA 5-15A plug, 120V power cord, 5 foot
Cut out for power cord	Minimum 3" square
Electrical Rating	1.2kW (120V)
Total Amps	10A on 120V

Shipping

Shipping Weight	70 lbs
Shipping Dimensions	23 ⁵ / ₈ " W x 22 ¹ / ₁₆ " H x 26" L

Support


Call	800.843.7231
------	--------------

Whole Bean Coffee System CVA 6805 BRWS




PRODUCT VIEWS

Isometric View

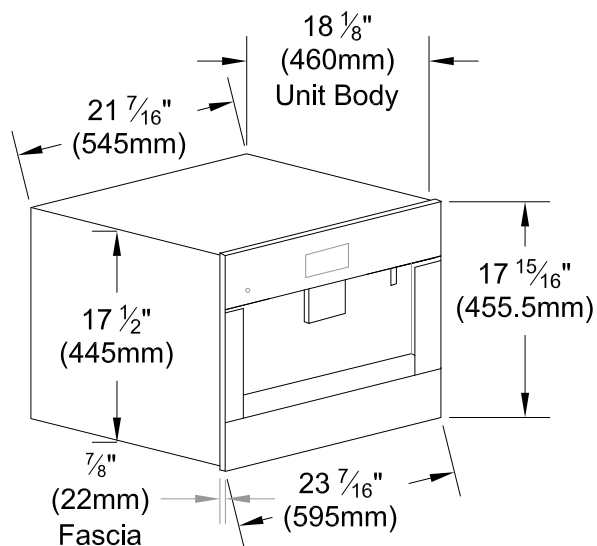

Top View, Door Open

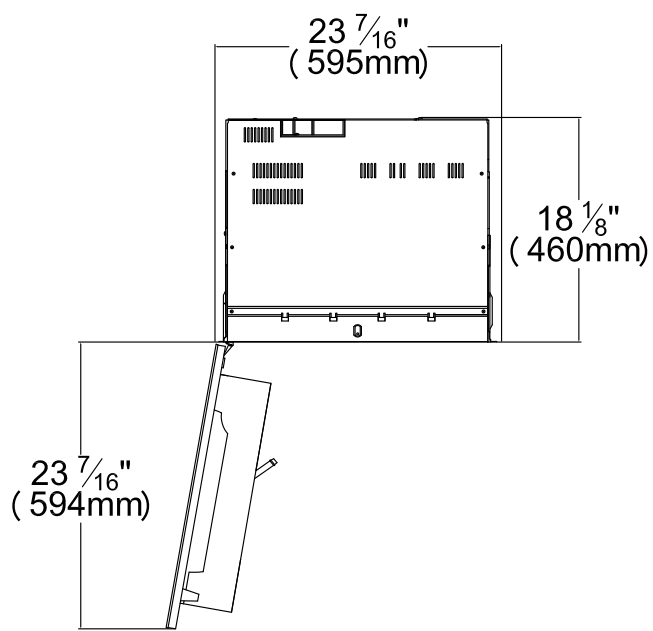


Whole Bean Coffee System

CVA 6805 BRWS




PRODUCT VIEWS

Front View

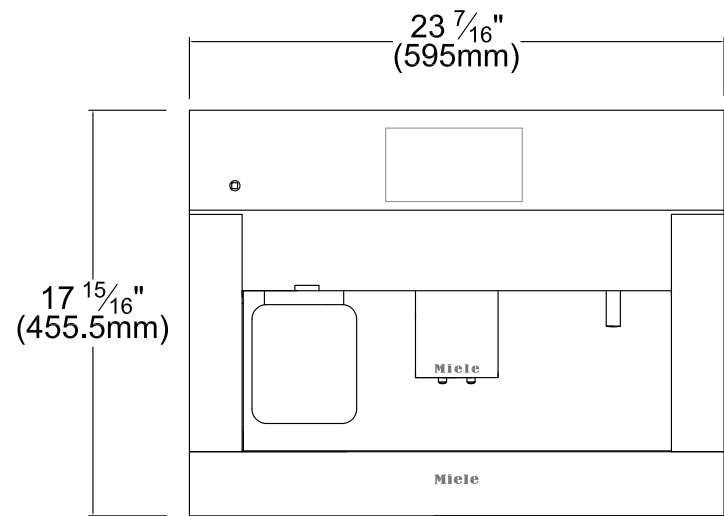


Side View

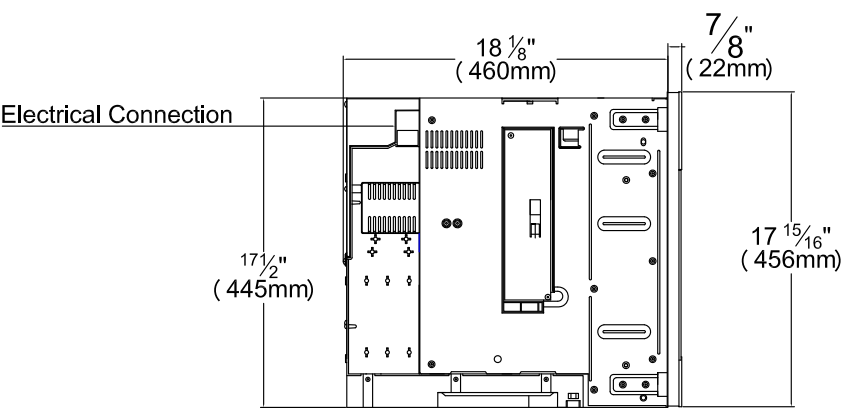

PRODUCT VIEWS


Rear View

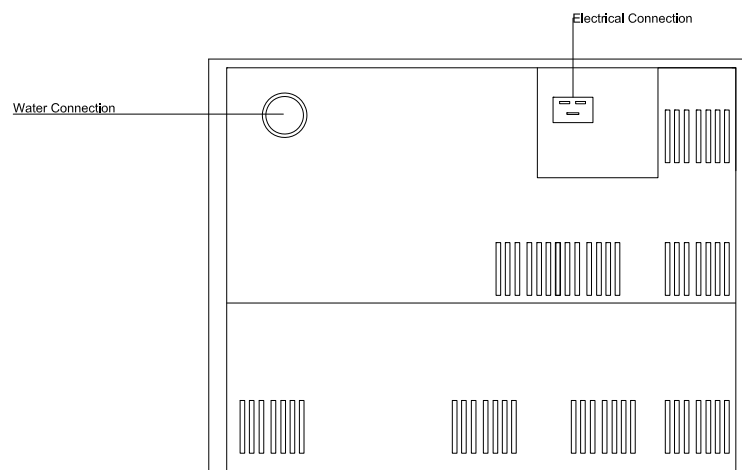

INSTALLATION SPECIFICATIONS

Niche

PLEASE NOTE: The vent cut out must only be at the top of the niche to prevent condensation inside the door and inner components that the customer can see when opening the door.

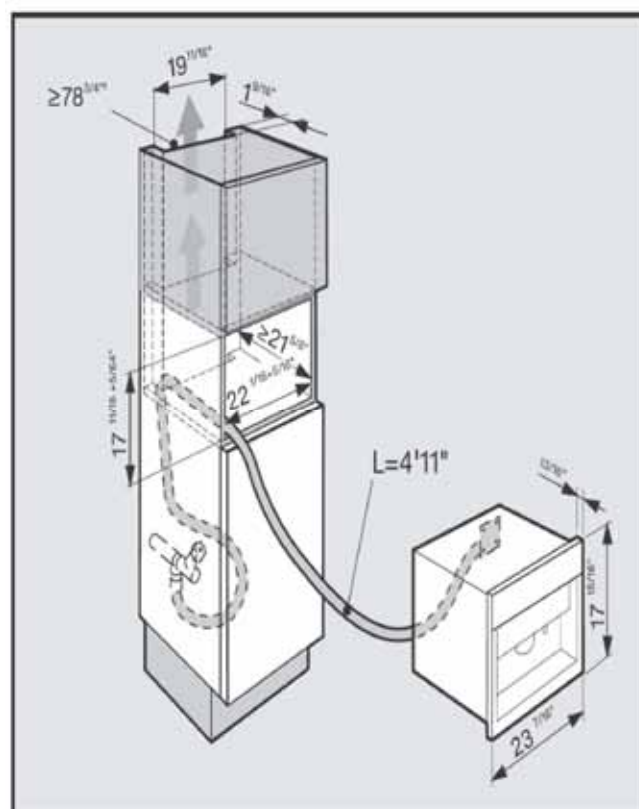

INSTALLATION SPECIFICATIONS

Niche (metric)

PLEASE NOTE: The vent cut out must only be at the top of the niche to prevent condensation inside the door and inner components that the customer can see when opening the door.

