

TEMPEST I wall

A streamlined under-cabinet pro-style range hood, Tempest I combines power, efficiency and flexibility. 650-CFM or optional 1200-CFM blower options and high-airflow baffle filters (that are dishwasher-safe) ensure a lifetime of exceptional performance. Additional options like a wireless remote control and recirculation kits for kitchens that require ductless venting ensure all you have to think about is cooking.

	INTERNAL BLOWER STANDARD	ACT™ INTERNAL BLOWER with AIRFLOW CONTROL TECHNOLOGY™
Single Blower (Included), Min.-Max. CFM	200 - 650	Min.-Max. CFM 200 - 390 200 - 290
Single Blower (Included), Min.-Max. Sones	1 - 6	Min.-Max. Sones 1 - 4 1 - 3
*Dual Blower (Optional), Min.-Max. CFM	400 - 1,200	
*Dual Blower (Optional), Min.-Max. Sones	2 - 9	

*Dual blower only compatible with 36" and 42" models

ACT™ is a feature built into Tempest I hoods with single internal blowers allowing you to limit the maximum blower CFM to meet local code requirements.




Optional Remote Control


TEMPEST I WALL | PRO-STYLE

ESSENTIALS
EUROPA POWER BREEZE


SIZE	
AK7000BS	30"
AK7036BS	36"
AK7042BS	42"
PERFORMANCE	
(INCLUDED) SINGLE INTERNAL BLOWER CFM	200 - 650
MIN.-MAX. SONES	1 - 6
(OPTIONAL) DUAL INTERNAL BLOWER CFM (AVAILABLE FOR AK7036BS/AK7042BS)	400 - 1,200
MIN.-MAX. SONES	2 - 9
COLOR	
STAINLESS STEEL	SS
FEATURES	
ACT™	Yes
CONTROLS	Electronic Touch
SPEED LEVELS	6*
AUTO DELAY-OFF	Yes
CLEAN AIR MODE	Yes
LIGHTING	Halogen, 35W x 2
DUAL LEVEL LIGHTING	Yes
FILTERS	
AK7000BS	SS Pro-Baffle x 2
AK7036BS/AK7042BS	SS Pro-Baffle x 3
WIRELESS REMOTE CONTROL OPTION	Yes
DUAL INTERNAL BLOWER OPTION	Yes
RECIRCULATING OPTION**	Yes, Single Blower Only
DUCT SPECIFICATIONS	
SINGLE INTERNAL BLOWER - VERTICAL	8" Round
SINGLE INTERNAL BLOWER - HORIZONTAL†	3-1/4" x 10" or 8" Round
DUAL INTERNAL BLOWER - VERTICAL	10" Round
DUAL INTERNAL BLOWER - HORIZONTAL	NA
AC POWER	
SINGLE INTERNAL BLOWER	120V, 60Hz at Max. 4A
DUAL INTERNAL BLOWER	120V, 60Hz at Max. 7.4A
OPTIONAL ACCESSORIES	
WIRELESS REMOTE CONTROL	14000005
DUAL INTERNAL BLOWER KIT	PBD-1200A
RECIRCULATING KIT**	
AK7000BS	ZRC-7000B
AK7036BS	ZRC-7036B
AK7042BS	ZRC-7042B
BACKSPLASH WITH SHELVES	
AK7000BS	AK0710
AK7036BS	AK0716
AK7042BS	AK0712
MAKE-UP AIR KIT, SINGLE BLOWER	MUA008A
MAKE-UP AIR KIT, DUAL BLOWER	MUA010A
MOUNTING HEIGHT††	
	26" - 36"
WARRANTY	
	3 Years Parts, 1 Year Labor

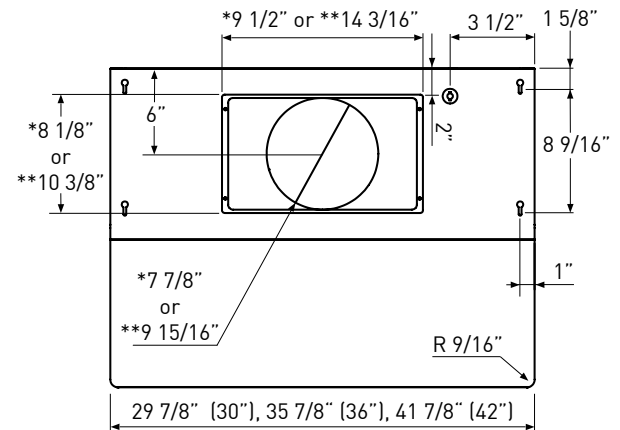

TOP

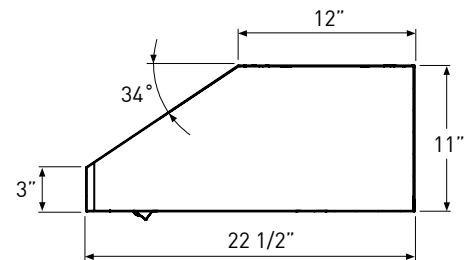

SIDE

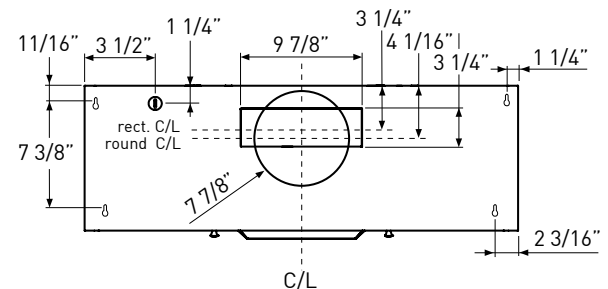

BACK

* Single Blower Dimension
** Dual Blower Dimension

Specifications subject to change, check zephyronline.com for up-to-date information.

*When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 3 speeds and ACT 290 CFM = 2 speeds.

**Recirculating kit includes a return-air box which adds an additional 4" to the hood height. Recirculating kit is only compatible with single blower.

†If horizontally ducting via 3-1/4" x 10", the maximum airflow of 650 CFM will be reduced to 550 CFM.

††Mounting height refers to distance between top of cooking surface and bottom of hood.



ZEPHYR