

Installation Requirements

The drawer microwave oven can be installed in a standard or flush inset application. Location of the electrical supply within the oven opening may require additional cabinet depth. Refer to the chart below.

Finish the edges of the opening. They may be visible when the drawer is open.

For flush inset installations, a minimum $\frac{1}{8}$ " (3) reveal is required on the top and sides and $\frac{11}{16}$ " (18) on the bottom. A sales accessory is required to direct air away from the unit. Accessories are available through an authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com. To ensure consistent reveals, each corner of the opening must be exactly 90°.

INSTALLATION REQUIREMENTS

BASE SUPPORT

24" Model	125 lbs (57 kg)
30" Model	125 lbs (57 kg)

TRIM OVERLAP

	24" MODEL	30" MODEL
Top	$\frac{5}{16}$ " (8)	$\frac{5}{16}$ " (8)
Bottom	$\frac{1}{16}$ " (2)	$\frac{1}{16}$ " (2)
Sides	$\frac{3}{4}$ " (19)	$3\frac{7}{8}$ " (98)

Anti-Tip Blocking

To reduce the risk of tipping, the drawer microwave oven must be secured in place by anti-tip blocking. The anti-tip blocking must be provided by the installer. Dimensions will vary with the installation. Refer to the illustration for your specific installation on pages 5–6.

When installed to the wall, make sure screws completely penetrate dry wall and are secured in wood or metal, so blocking is completely stable. When fastening, verify screws do not penetrate electrical wiring or plumbing.

The anti-tip blocking prevents serious injury that might result from the drawer tipping forward and hot food being spilled.

Electrical

Installation must be electrically grounded in accordance with local codes or, in the absence of local codes, with the National Electrical Code, ANSI/NFPA 70.

The receptacle should be located in the upper left area of the opening. Refer to the illustrations on pages 5–6. The receptacle may also be located in an adjacent cabinet within reach of the power cord. An access hole must be provided through the cabinet for the power cord.

IMPORTANT NOTE: The microwave oven is equipped with a power cord with a 3-prong grounding plug. The power cord must be plugged into a mating 3-prong grounded outlet. If you only have a 2-prong outlet, have a qualified electrician install a properly grounded outlet. If you have any questions about the grounding or electrical instructions, consult a qualified electrician or service technician.


ELECTRICAL REQUIREMENTS

DRAWER MICROWAVE OVEN

Electrical Supply	grounded, 120 VAC, 60 Hz
Service	15 amp dedicated circuit
Receptacle	3-prong grounding-type
Power Cord	4' (1.2 m)

GROUNDING INSTRUCTIONS

This appliance must be grounded. The drawer microwave oven is equipped with a cord having a grounding wire with a grounding plug. It must be plugged into a wall receptacle that is properly installed and grounded in accordance with the National Electrical Code and local codes and ordinances. In the event of an electrical short circuit, grounding reduces risk of electric shock by providing an escape wire for the electric current.

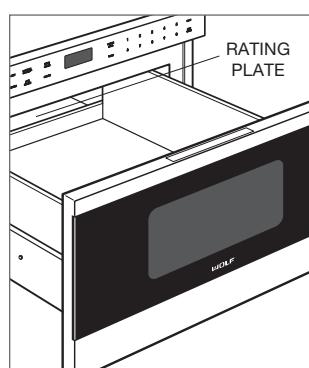


Rating plate location.

SPECIFICATIONS

Drawer Microwave Oven

STANDARD INSTALLATION

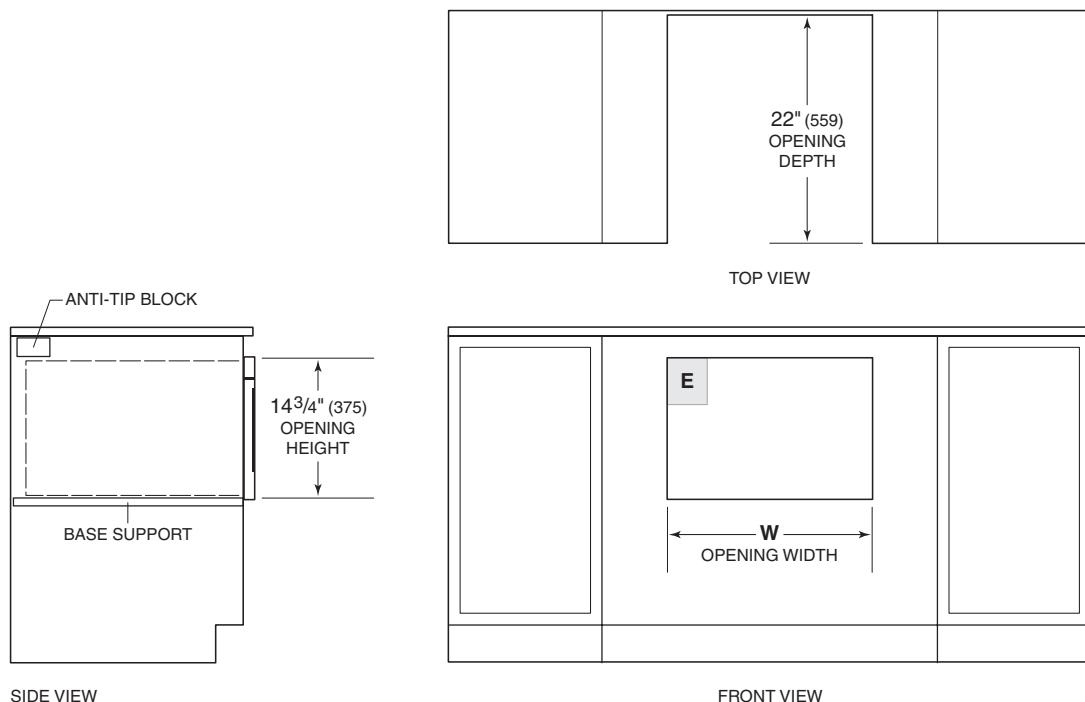

SIDE VIEW

FRONT VIEW

*NOTE: All drawer microwave ovens require the same opening dimensions.
Dashed line represents profile of unit.*


STANDARD INSTALLATION

MODEL	A
24" Model	22 1/8" (562)
30" Model	22 1/8" (562)

SPECIFICATIONS

Drawer Microwave Oven

FLUSH INSET INSTALLATION

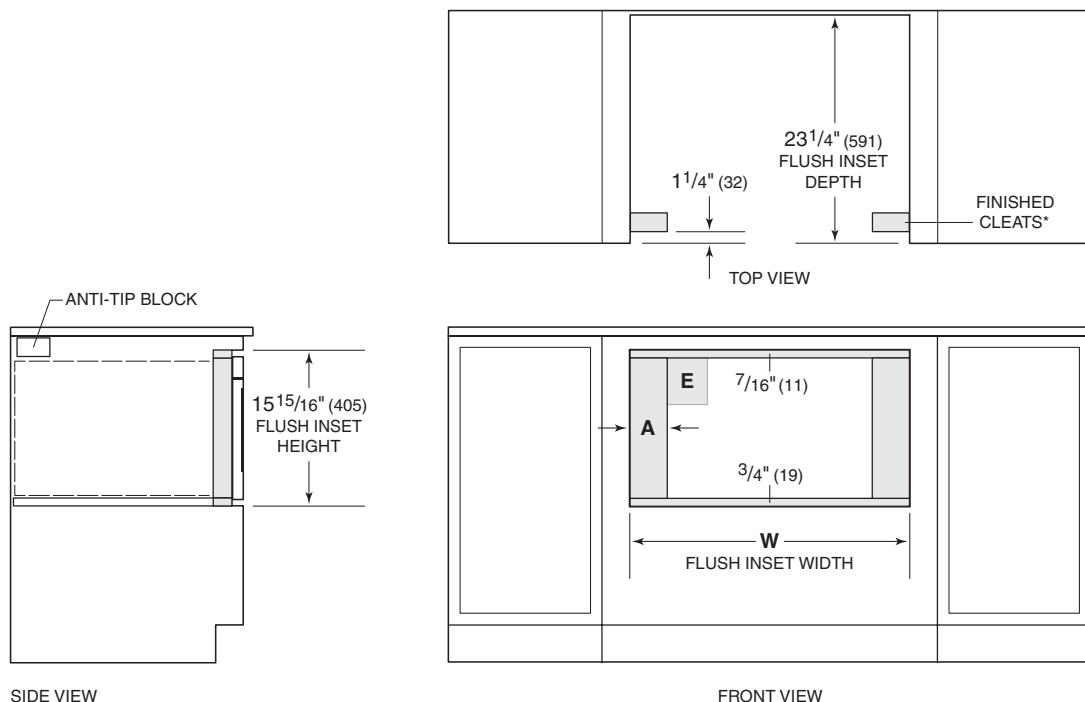

SIDE VIEW

FRONT VIEW

*Will be visible and should be finished to match cabinetry.

NOTE: Dashed line represents profile of unit.

FLUSH INSET INSTALLATION

MODEL	A	B
24" Model	$24\frac{3}{8}''$ (619)	$1\frac{1}{8}''$ (29)
30" Model	$30\frac{3}{8}''$ (772)	4" (102)